AUTOKID TRUCK SOLUTIONS

QUOTATION

CUSTOMER INFORMATION

SERIAL NO.: 000000000000

COMPANY: _____ DATE: _____

ATTENTION: _____ CONTACT NO.: _____

ADDRESS: _____ EMAIL.: _____

VEHICLE DETAILS

BRAND / TYPE:	SANY	ENGINE:	Cummins 4BTAA3.9-C125
MODEL:	SSR120C-10	RATED POWER:	125 HP
WEIGHT:	12,000 kg	DRUM WEIGHT:	7000 kg

SANY SINGLE DRUM ROLLER SSR120C-10

CASH	
SRP	₱3,199,000.00
3 YEARS LTO	FREE
OTHERS	₱
TOTAL	₱

FINANCING		DETAILS	
DOWN PYMT.	₱	LOAN AMT.	₱
INSURANCE	₱	NO. OF MONTHS	
CMF	₱	MONTHLY PYMT.	₱
3 YEARS LTO		TOTAL DP	₱
TOTAL	₱		

TERMS & VALIDITY

TERMS OF PAYMENT:

- Cash, Online Cash Deposit, or Check (Subject to Bank Clearing).
- Financing Standard (30% Down Payment, Loan Term up to 36 months).
- Deposit / Down payment is valid for 15 days.

VALIDITY:

- Valid Until December 31, 2021.

WARRANTY

- **18 months or 3000 hours** whichever comes first.
- The use has strictly followed requirements specified in the operation manual.
- Vehicle has not been modified or tampered in anyway.
- Warranty period will be halved if hydraulic breaker is used.

PREPARED BY: AUTHORIZED SIGNATORY: CLIENT CONFORME:

F-TS-001-00-01/Sep/2020

QUOTATION

AUTOKID TRUCK SOLUTIONS

SANY®

SSR120C-10 SINGLE DRUM ROLLER
SSR120C-10 单钢轮压路机

EXTENDED LIFE TIME

- The use of water wheel type lubrication on the vibratory bearing extends the bearing life up to 5,000 hours.
- Double filtration of engine high intake air, the hydraulic system contains three stage filtration.

OPERATOR COMFORT

- Cab mounted on vibration damping mounts
- Cab temperature control
- Operator control forces have been reduced

SAFETY FEATURES

- Rounded bumpers front and rear
- Large rear glass and sloped hood for greater visibility

HIGH EFFICIENCY

- 10% greater excitation force than other products in the same category resulting in 16.7% greater production.

更长的整机使用寿命
- 独创鼠笼式润滑装置充分润滑轴承，轴承使用寿命达 5000h 以上
- 发动机高位进气双重滤清，油路三级过滤

更高的压实作业效率
- 激振力在行业中比同类型号高出 10%，压实作业效率提升 16.7%

舒适的操作环境
- 驾驶室安装在减振支架上
- 驾驶室温度可控制
- 操作员控制力已减少

更安全的人性化设计
- 前后保险杠确保操作手的安全
- 大后窗玻璃和倾斜的引擎盖提供更大的能见度

www.autokid.com.ph
8706-6666
0917-653-0000
9 Joy Street, Brgy. Balingasa, Grace Village, Quezon City, Philippines

QUOTATION

TECHNICAL PARAMETERS
技术参数

SSR120C-10 单钢轮压路机技术参数
SSR120C-10 Single Drum Roller Technical Parameters

型号 Model		SSR120C-10
质量载荷参数 Weight and Load	工作质量 Operating Weight(kg)	12000
	振动轮分配质量 Weight at Drum(kg)	7000
	驱动桥分配质量 Weight at Rear axle(kg)	5000
	振动轮静线载荷 Drum Static Linear Load(N/cm)	329
压实机构参数 Compaction	振动频率 Vibration Frequency (Hz)	32/36
	名义振幅 Nominal Amplitude(mm)	1.8/0.9
	激振力 Excitation Force(kN)	280/178
	振动轮直径 Drum Diameter(mm)	1500
	振动轮宽度 Drum Width(mm)	2130
	振动轮轮圈厚度 Drum Edge Thickness(mm)	25
机动性能参数 Maneuver Ability	工作速度 Working Speed(km/h)	0~6.0
		0~7.5
	行驶速度 Travel Speed(km/h)	0~8.5
		0~12.5
	理论爬坡能力 Gradeability	50%
		53%
	最小离地间隙 Ground Clearance(mm)	480
	轴距 Wheelbase(mm)	2868
	转向角度 Steering Angle(°)	±35
	摇摆角度 Swing Angle(°)	±12
	最小转弯外直径 Min. Turning Outside Diameter(mm)	11600
	轮胎规格 Tires	23.1-26-8PR
发动机 Engine	供应商 Brand	DONGFENG CUMMINS
	型号 Model	4BTAA3.9-C125
	排放 Emission	/
	额定功率 Rated Power(kW)	93
容量参数 Capacity	蓄电池 Battery(V×Ah)	24×120
	燃油箱 Fuel Tank(L)	250
	液压油箱 Hydraulic Oil Tank(L)	70

单钢轮压路机 SSR120C-8 标配选配表
Single Drum Roller SSR120C-10 Standard and Optional Configurations

配置类型 Config	配置名称 Systems	物料名称 Description	数量 / 台 Quantity	详细说明 Details		备注 Remarks
标准配置 Standard Configuratoin	主机 Main Machine	SSR120C-10 单钢轮压路机标配 SSR120C-10 Single Drum Roller, Standard	1	1.Engine 发动机 2.Travel Pump 行驶泵 3.Vibration Pump 振动泵 4.Travel Motor 行驶马达 5.Vibration Motor 振动马达 6.Reduction Gears 减速机 7.Operating Platform 操作平台 8.Vibratory Drum (Smooth) 振动轮 (光轮) 9.Electrical System 电气系统	10.Operating System 操纵系统 11.Front Frame 前车架 12.Rear Frame 后车架 13.Covering Part 覆盖件 14.Rear Axle Assembly 后桥总成 15.Center Articulated Frame 中心铰接架 16.Cab+A/C 驾驶室 + 空调	
可选配置 Optional Configuratoin	驾驶棚 Shed	驾驶棚 Shed	1	低成本 Low Cost		选配 Optional
	焊接式凸块振动轮 Vibratory Drum with Welded pad foot	凸块振动轮 Drum with Welded pad foot	1	振动轮焊接凸块，用于粘土、半粘土、岩石、碎石、膨胀土、煤渣等地基的压实，而且凸块不能拆卸 Vibratory drum with welded pad foot, which cannot be removed, suitable for compaction of clay, semi-clay, rocks, gravels, expansive soil, and coal cinder base		可选配替代光轮 Substitute smooth drums permissible
	装配式凸块振动轮 Vibratory Drum with Assembled pad foot	装配式凸块总成 Drum with Assembled pad foot	1	振动轮装配凸块总成，用于粘土、半粘土、岩石、碎石、膨胀土、煤渣等地基的压实，拆卸凸块后，可以作光轮压实，实现一机两用。 Vibratory drum with assembled pad foot, which can be removed to form a smooth drum; suitable for compaction of clay, semi- clay, rocks, gravels, expansive soil, and coal cinder base		选配 Optional

单钢轮压路机 SSR120C-10 尺寸参数
Dimensions of SSR120C-10 Single Drum Roller

主要尺寸 Size Code	SSR120C-10
A(mm)	2868
W(mm)	2285
L(mm)	5775
D(mm)	1500
H(mm)	3225
B(mm)	2130
K(mm)	480



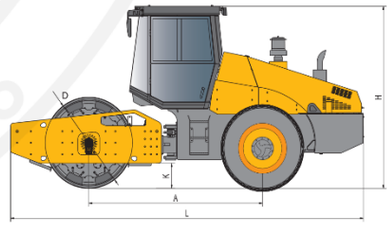

SANY®
QUALITY CHANGES THE WORLD.

AUTOKID TRUCK SOLUTIONS

www.autokid.com.ph
8706-6666
0917-653-0000
9 Joy Street, Brgy. Balingasa, Grace Village, Quezon City, Philippines