


## XCMG TRUCK MOUNTED CRANE (6.3 TONS)



<b>Type</b>	<b>6.3 Tons</b>
<b>Crane Model</b>	KSQS157TL-4
<b>Max Lifting Moment</b>	157.5 kN.m
<b>Max Lifting Capacity</b>	6300 kg at 2.5 m
<b>Max Hook Height</b>	14.2 m
<b>Max Working Radius</b>	12 m lift 500 kg
<b>Boom Length</b>	Min 4.3 m ~ Max 12.24 m
<b>Boom Type / Sections</b>	Hexagon / 4
<b>Elevation Range</b>	1° to 78°
<b>Slewing Angle</b>	360° Continuous
<b>Outriggers</b>	Hydraulic Horizontal and Vertical Extension, Rectangle Tube Protected
<b>Outriggers Span</b>	5100 mm
<b>Operation</b>	Ground control on both sides
<b>Max Pressure of Hydraulic System</b>	22 Mpa
<b>Rated Flow od Hydraulic System</b>	63 L/min
<b>Oil Tank Capacity</b>	90 L
<b>Recommended Power</b>	26 kw
<b>Installation Space</b>	900 mm
<b>Crane Weight</b>	2200 kg
<b>Suitable Trucks</b>	Medium Duty, 6 Wheels, GVW: 12 Tons – 16 Tons

### Loading chart

Rated load(kg)		Working radius(m)													
		2.5	3	3.5	4	5	6	6.5	7	8	9	9.5	10	11	12
Boom length(m)	4.3	6300	5000	4200	3600 (4.05m)										
	6.94	3000	3000	2760	2510	2030	1690	1410 (6.7m)							
	9.6	1850	1850	1820	1820	1760	1580	1420	1360	1260	1120	1080 (9.36m)			
	12.24		1500	1420	1370	1320	1150	1060	1000	930	850	800	750	600	500

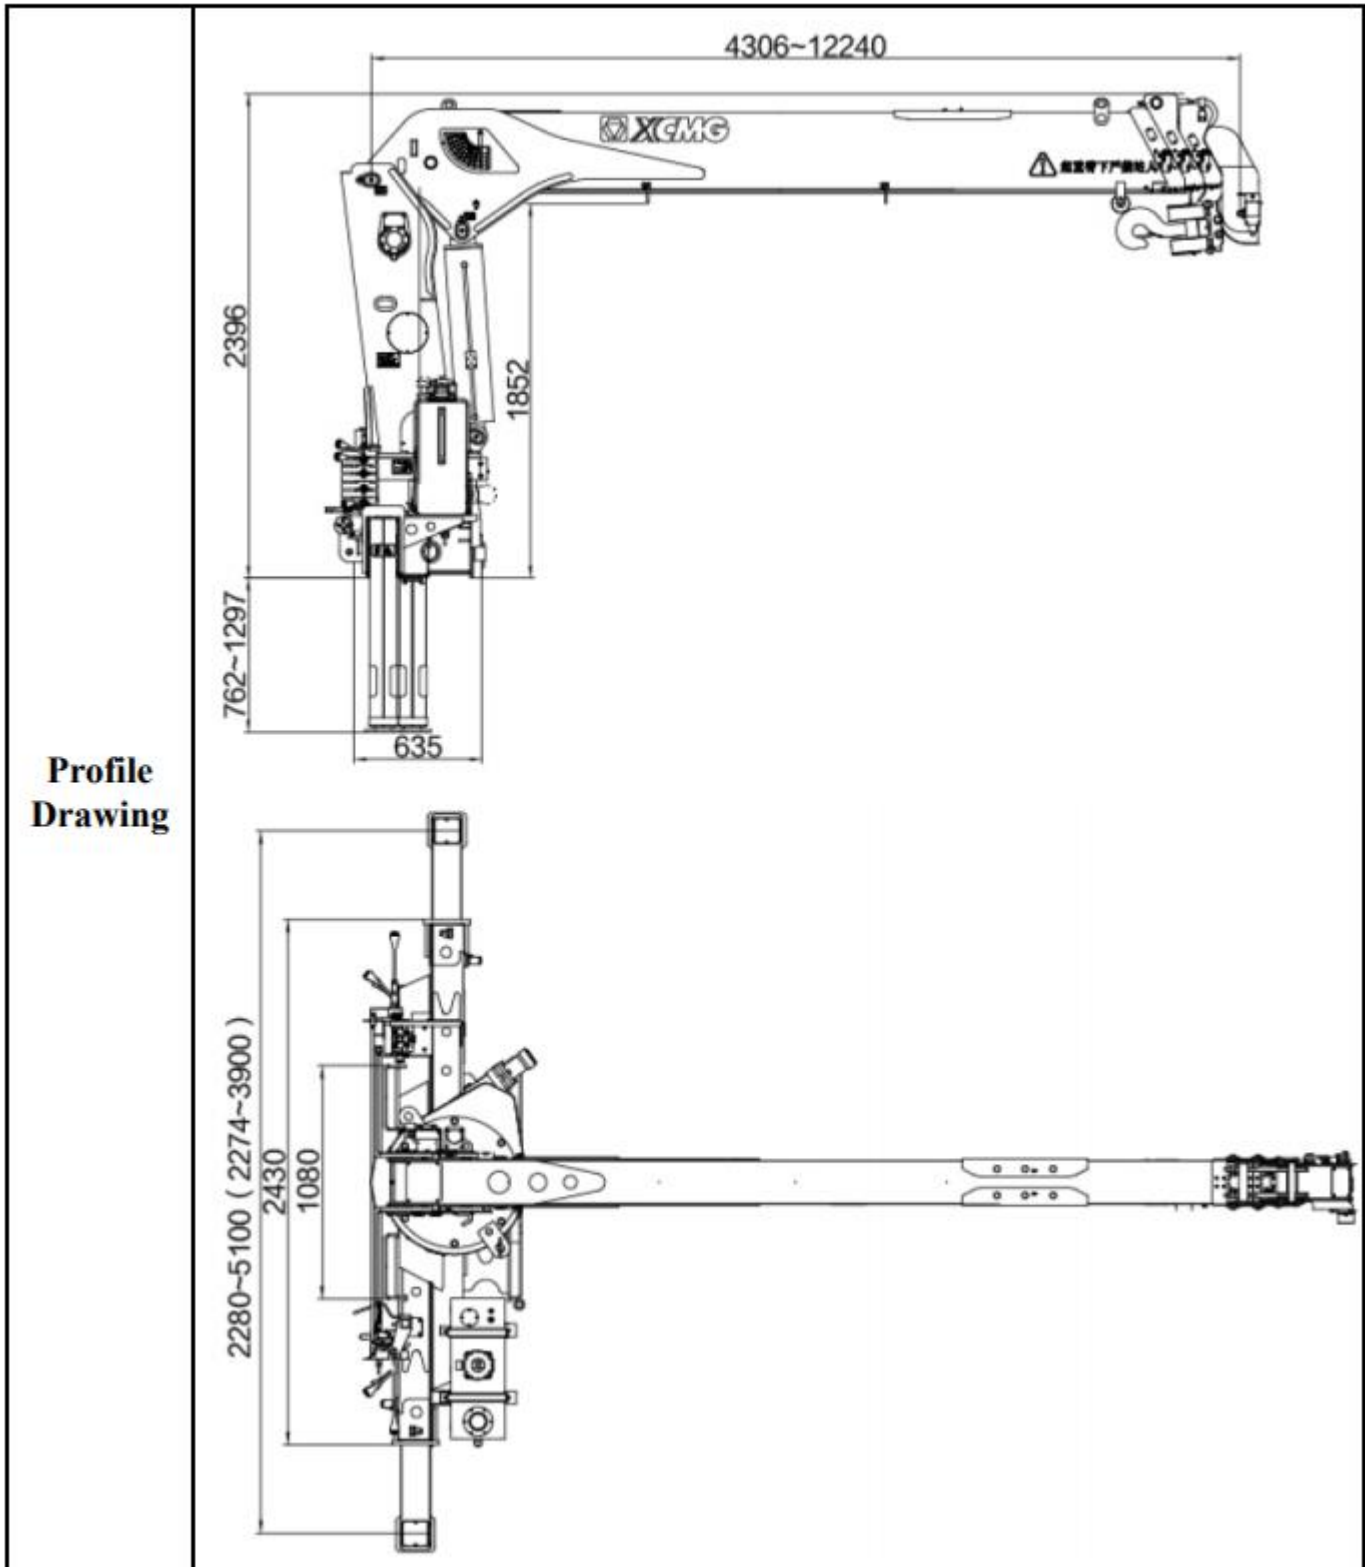

**Loading  
Diagram**

